

GROVE GMK5130-2 130 T mobilkran



Tekniske data G130

- Teleskop udskyder + 18 m flyjib
- Terrængående
- Krabbestyring
- Dobbelt spil - 14 t runner






12,9 - 60 m



7,5 m



360°

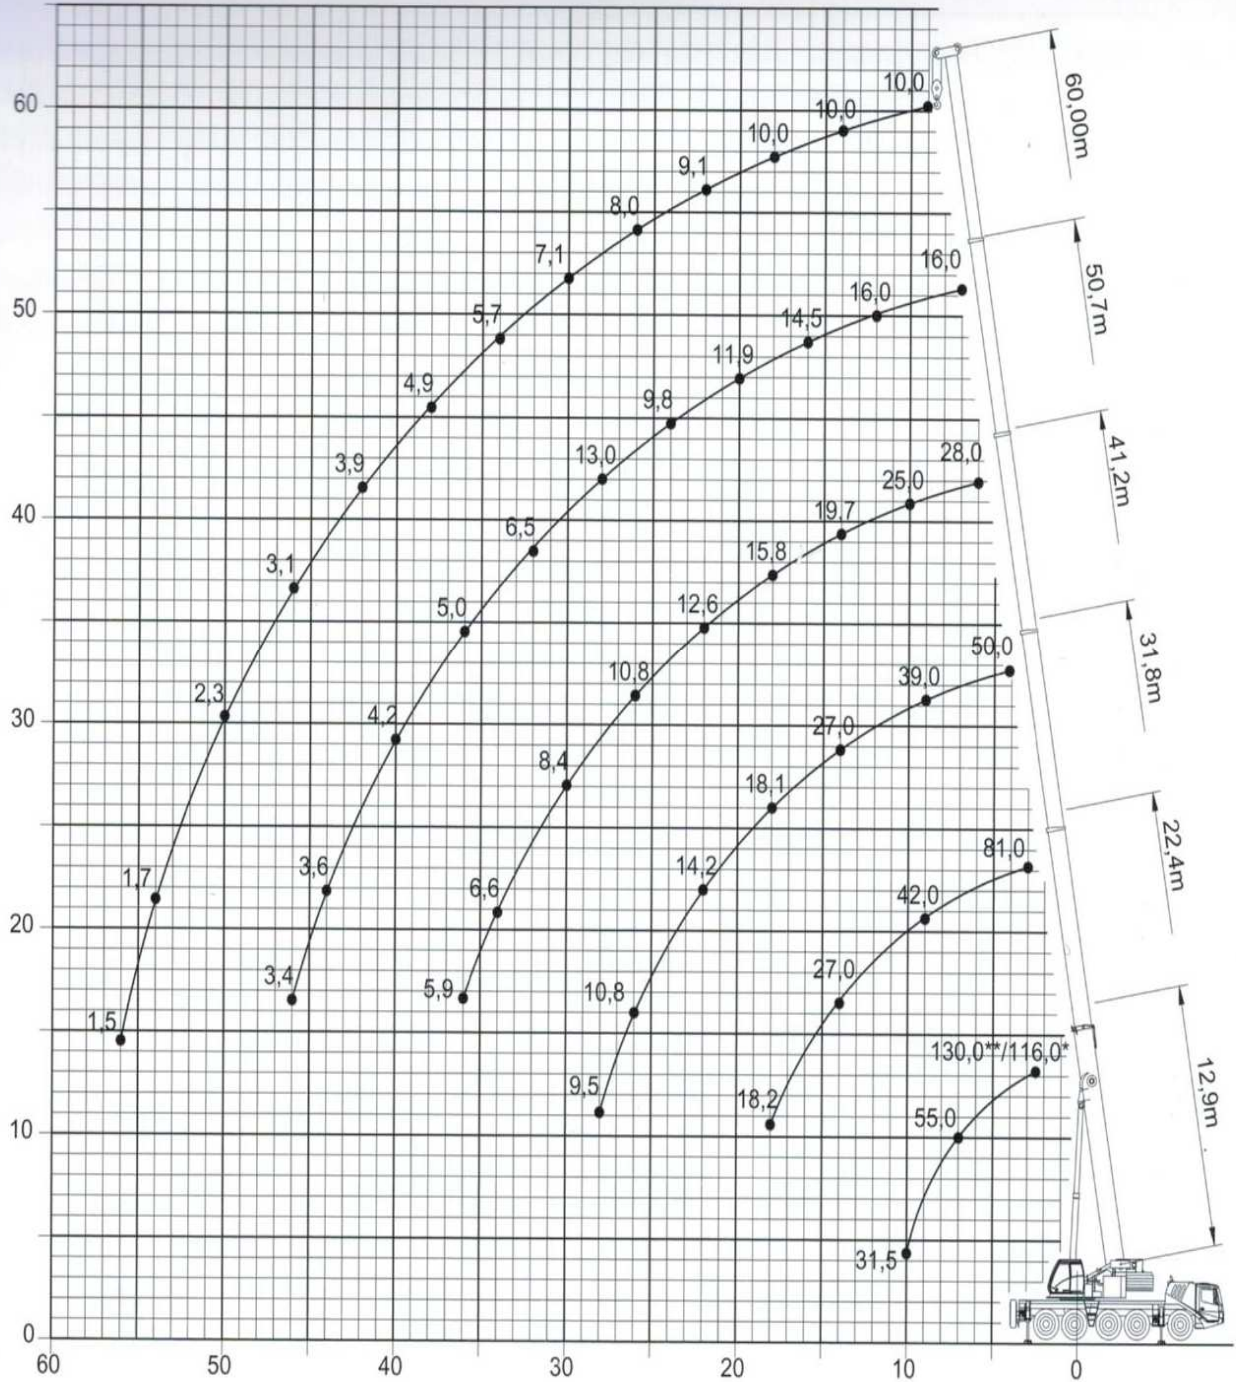

Løftekapacitet med hovedbom
40,1 t kontravægt

Radius m	Hovedbom m										
	12,9	17,69	22,48	27,16	31,84	36,45	41,24	45,99	50,71	55,39	60,0
2,2	130,0*										
3	94,5	86,0	81,0	65,0							
4	81,0	76,5	71,0	65,0	50,0						
5	70,5	67,5	63,5	60,5	49,5	38,0					
6	62,0	60,0	57,5	54,5	47,0	37,0	28,0	20,5			
7	55,0	53,0	52,0	50,0	44,0	35,0	28,0	20,5	16,0		
8	48,0	47,0	47,0	46,0	41,5	33,0	28,0	20,5	16,0	11,6	
9	41,0	42,0	42,0	41,5	39,0	31,5	26,5	20,5	16,0	11,6	10,0
10	31,5	38,0	38,0	37,5	37,0	29,5	25,0	20,5	16,0	11,6	10,0
11		34,5	34,5	34,0	34,5	28,0	23,5	20,5	16,0	11,6	10,0
12		31,5	31,5	31,0	32,0	26,5	22,5	19,5	16,0	11,6	10,0
13		29,0	29,0	28,5	29,5	25,0	21,0	18,6	16,0	11,6	10,0
14		35,0	27,0	26,0	27,0	23,5	19,7	17,7	15,8	11,6	10,0
15			24,0	24,5	24,5	22,5	18,7	16,8	15,2	11,6	10,0
16			21,5	22,5	22,0	21,5	17,6	15,9	14,5	11,6	10,0
18			18,2	18,6	18,1	18,9	15,8	14,4	13,0	11,6	10,0
20				15,7	16,1	15,9	13,9	12,7	11,9	11,1	9,7
22				13,4	14,2	13,6	12,6	11,5	10,8	10,3	9,1
24				9,6	12,3	11,8	11,6	10,4	9,8	9,4	8,6
26					10,8	10,2	10,8	9,5	8,9	8,6	8,0
28					9,5	9,3	9,5	8,4	8,2	7,9	7,6
30						8,7	8,4	7,5	7,5	7,3	7,1
32						8,0	7,5	6,9	6,5	6,5	6,4
34							6,6	6,2	5,7	5,7	5,7
36							5,9	5,9	5,0	5,3	5,3
38								5,5	4,5	5,0	4,9
40								5,0	4,2	4,7	4,5
42								4,5	3,9	4,4	3,9
44									3,6	3,9	3,5
46									3,4	3,5	3,1
48										3,1	2,7
50										2,7	2,3
52											2,0
54											1,7
56											1,5

* bagud

Dimensioner

Højde: 4,0 m
 Længde: 16,2 m
 Bredde excl. støtteben: 3,10 m
 Bredde incl. støtteben: 7,50 m
 Længde mellem støtteben: 7,80 m



Dobbelt spil

Standard-kontravægt på kran: 8,5 t

Akseltryk 12 t pr. aksel

Yderligere kontravægt op til 40,1 t